


Electric Standing Desk

Model: SD01-55IN & 63IN

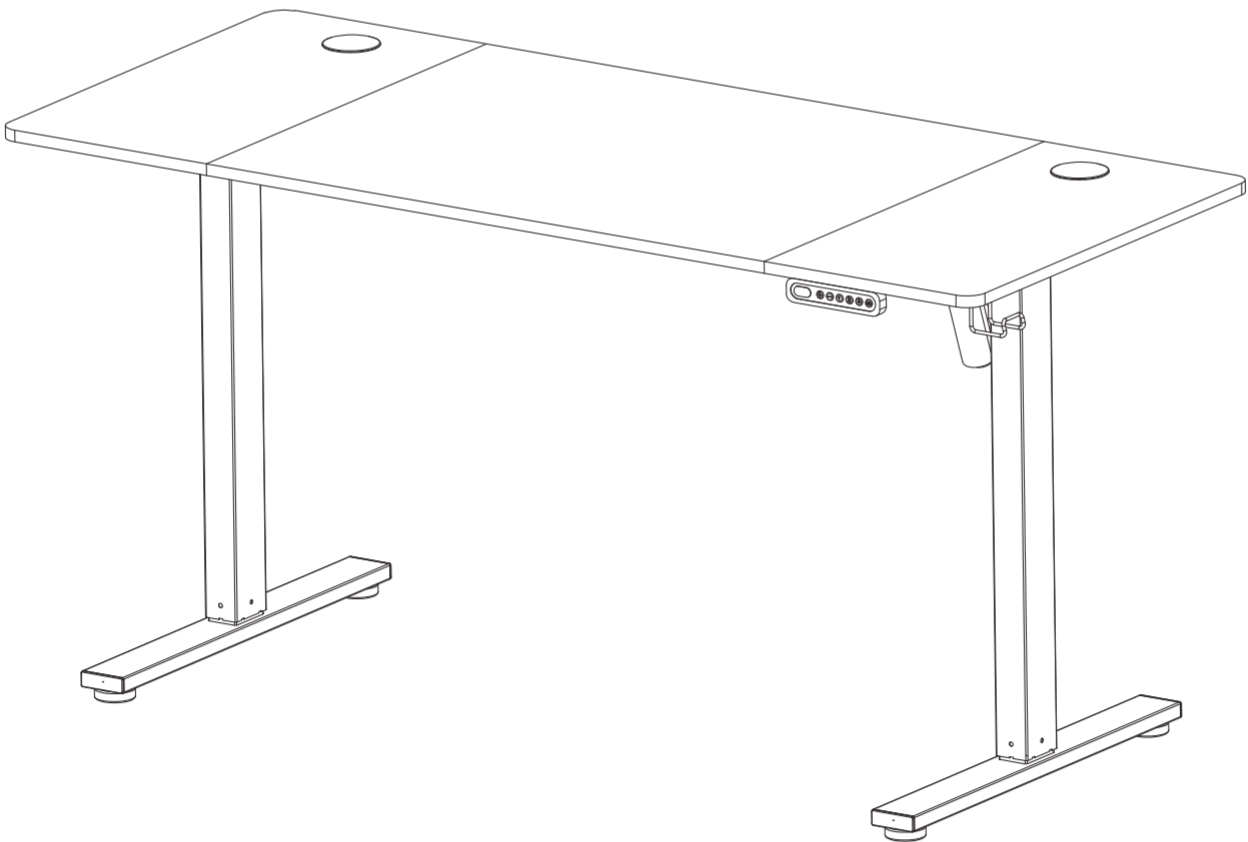


Contact info



Email: AfterSales-ServiceCenter@outlook.com

Generally Guidelines


Before assembling, please check whether all the spare parts are complete or damaged, if there is a lack of contact after-sales processing.

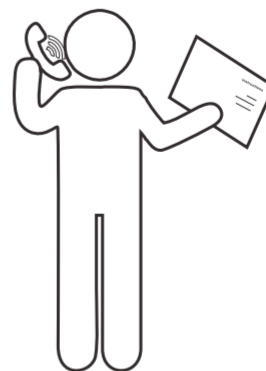







Prior to installation, we recommend placing a cloth underneath the product to protect the floor and the product.

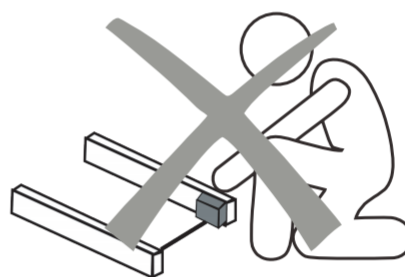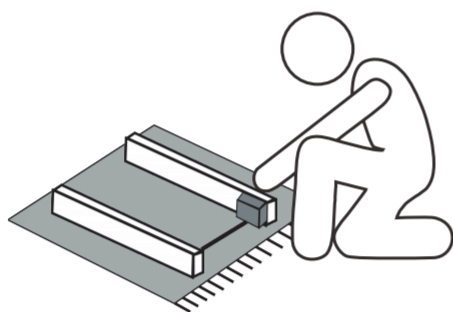

Components Identification

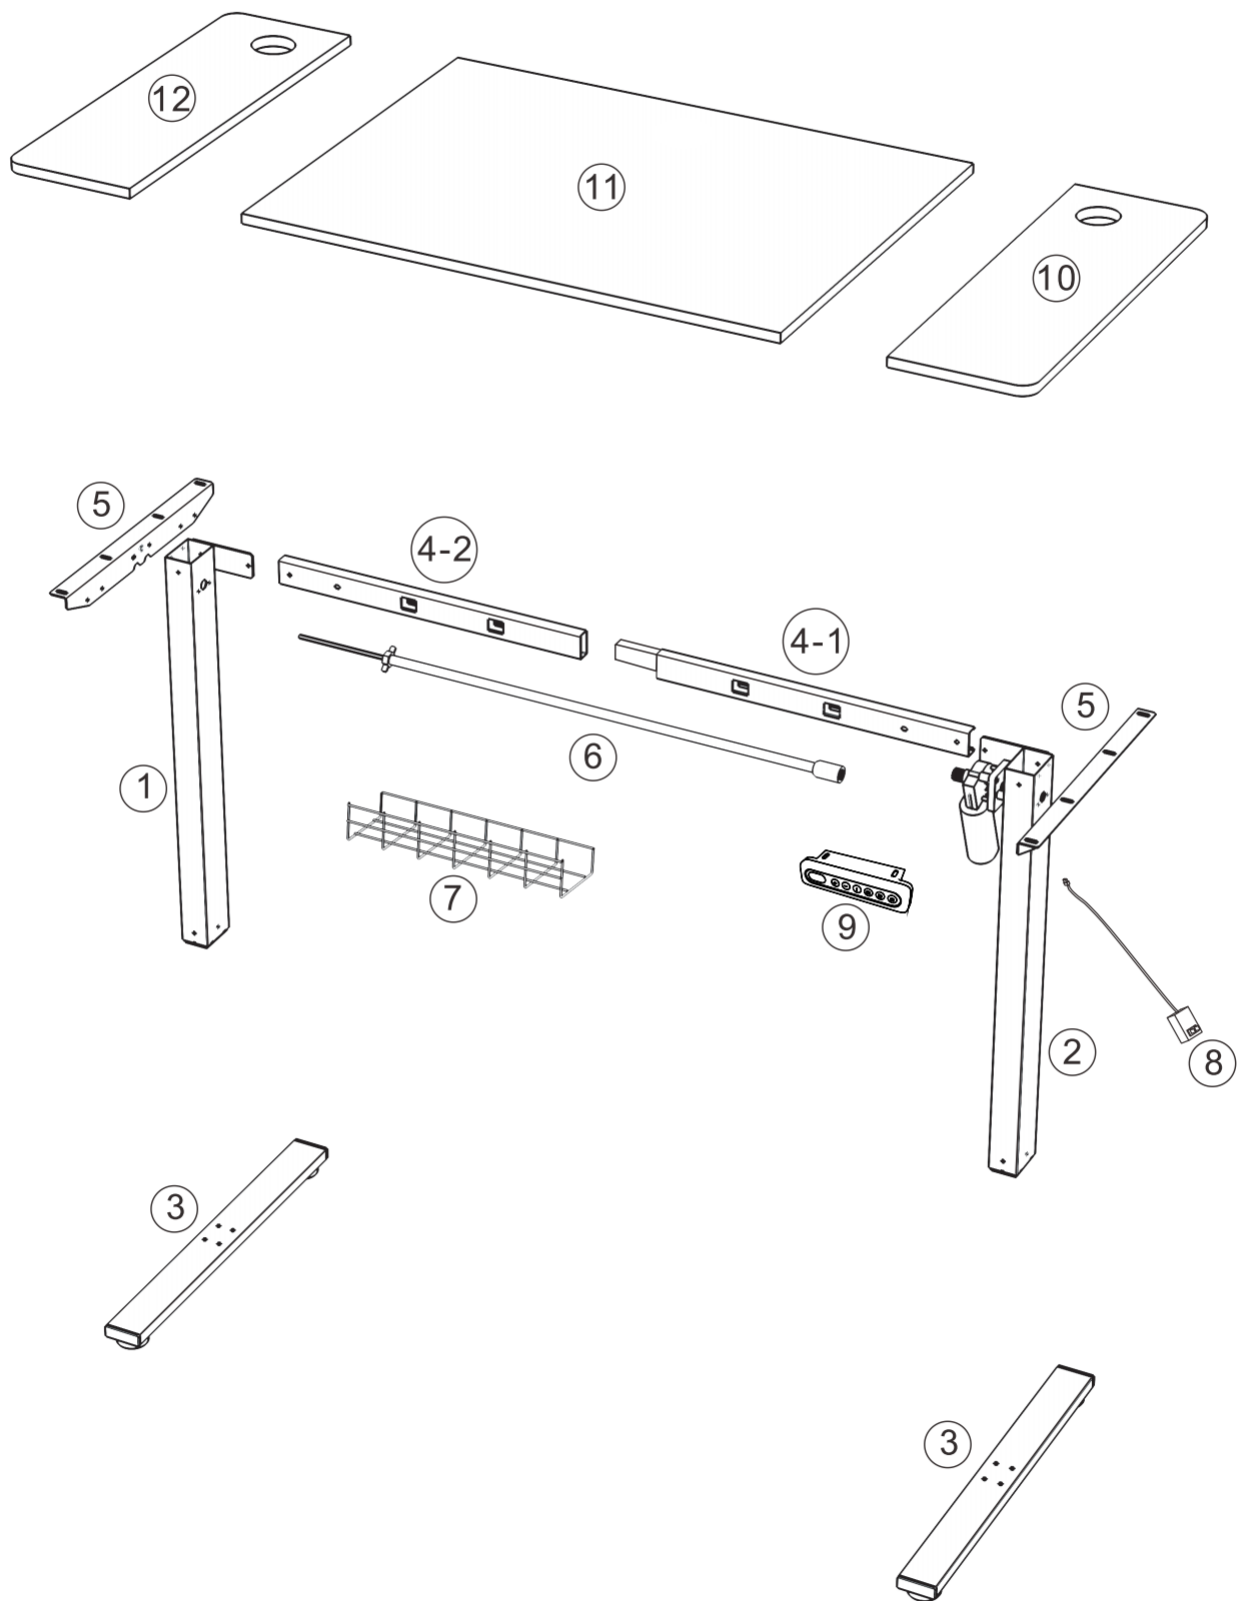


Hardware Identification

L		M6*35mm	8pcs
M		M6*12mm	34pcs
N		M4*12mm	2pcs
O		4mm Allen Wrench	1pc
P		Cross Allen Wrench	1pc
Q		Dowel	6pcs
R		Cable Ties	4pcs
S		Hooks	2pcs
T		Fastener	4pcs
U		Desktop reinforcement	2pcs

Installation Steps

Step 1

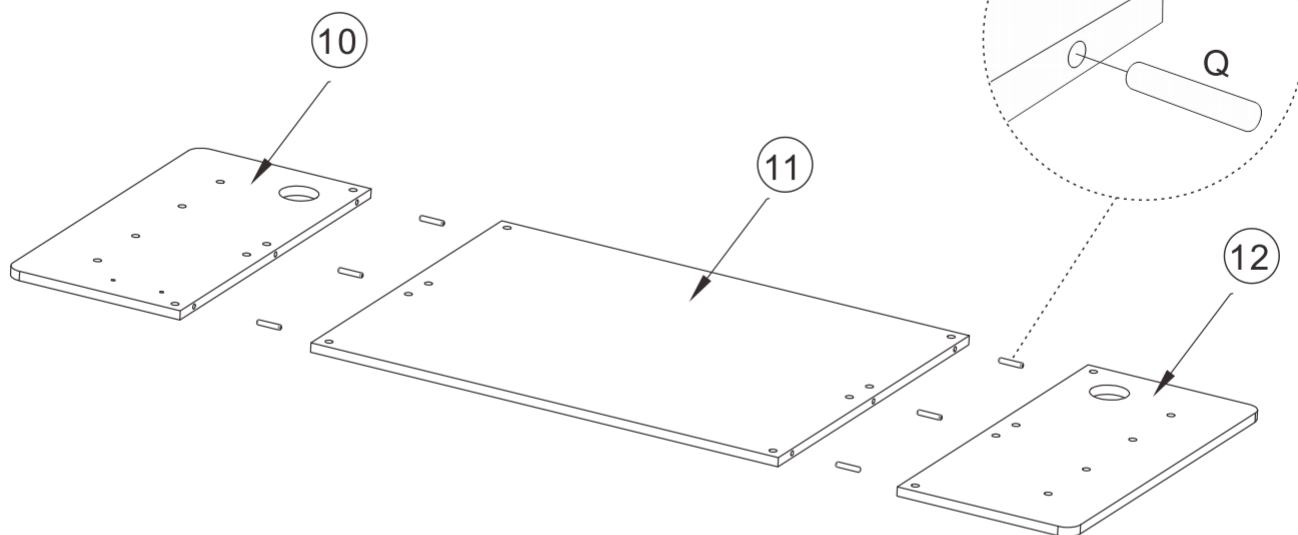


Q



X6

Step 2

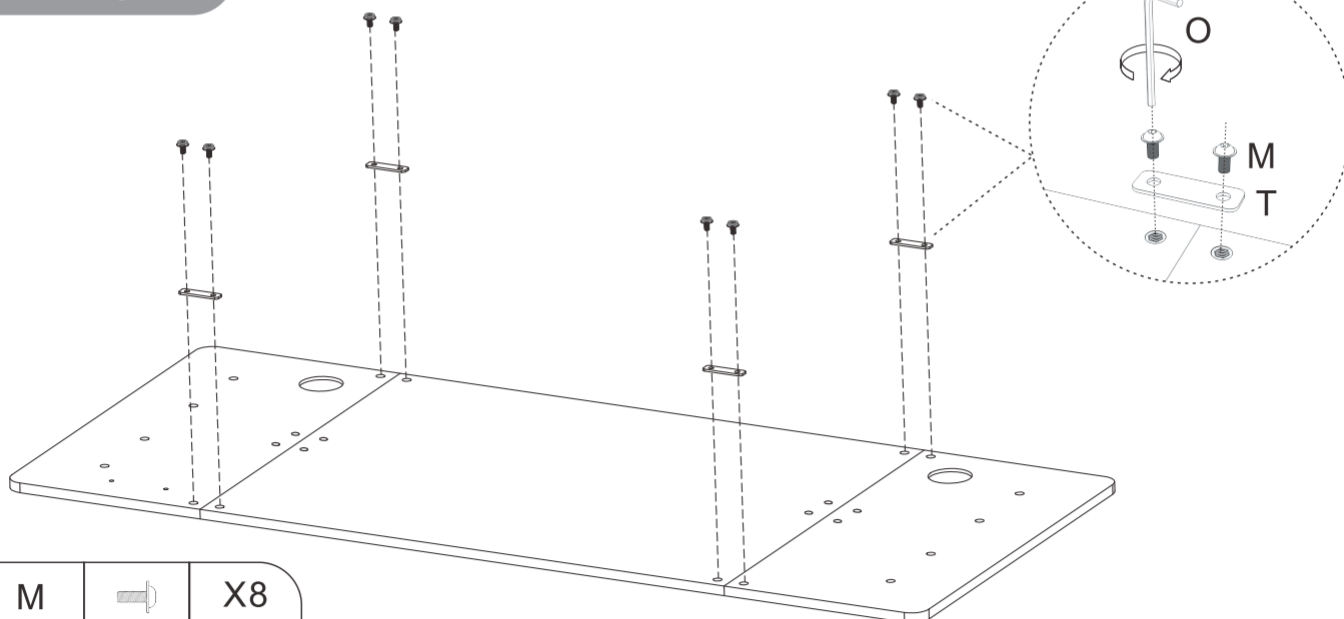

M



X8

O



X1


T



X4

Note: Do not fully tighten the screws until all of them are in place.


Step 3

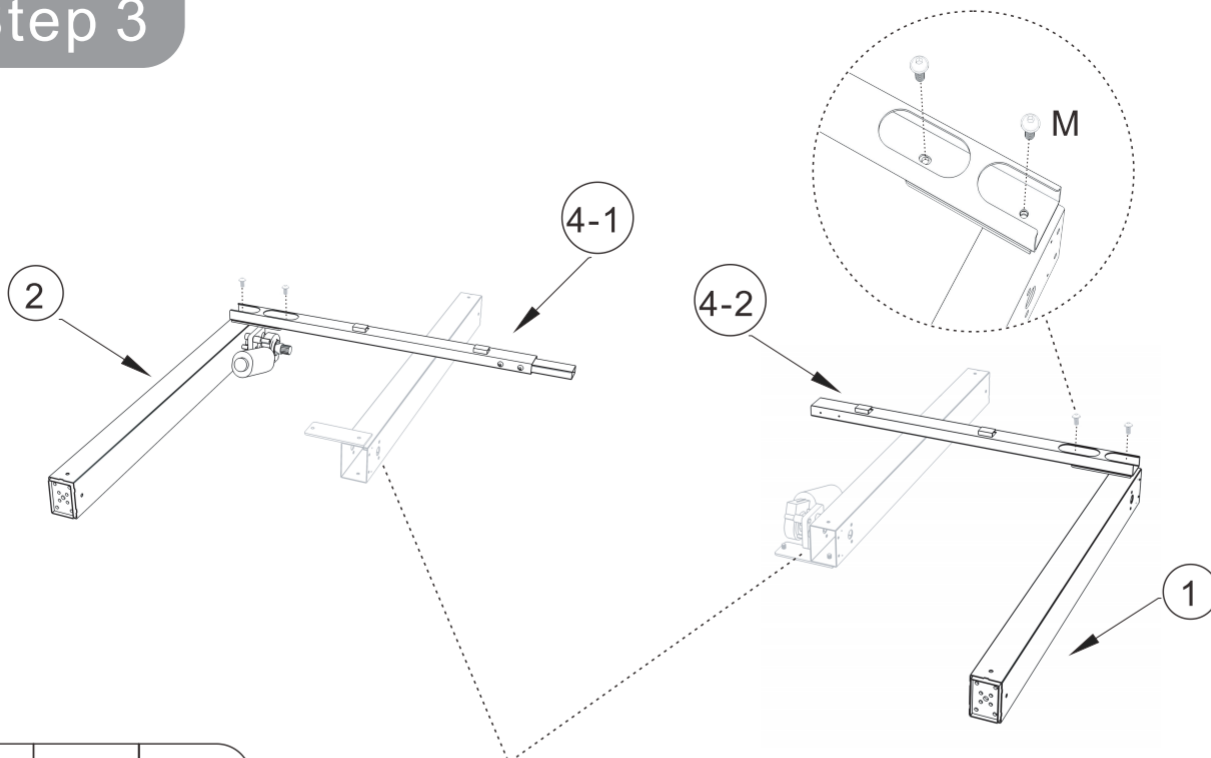

M		X4
O		X1

When installing the connector, use another leg underneath to keep it level for easier installation.


Step 4

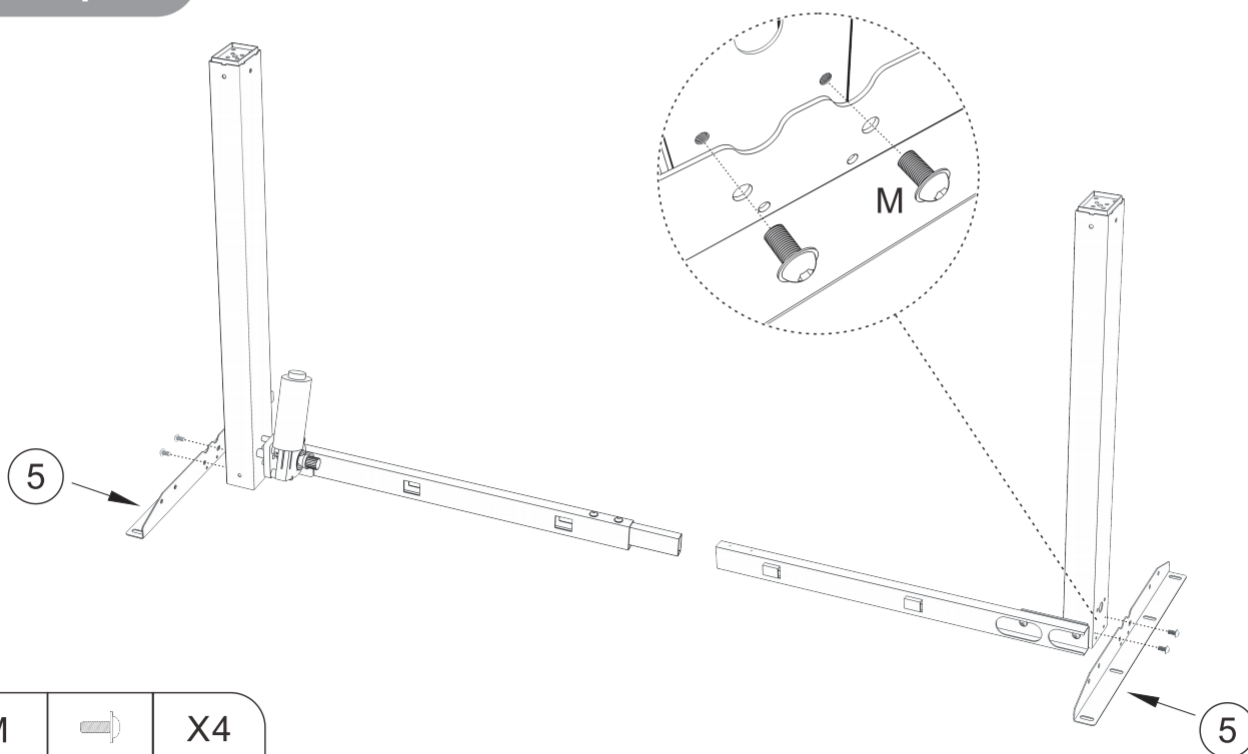


M		X4
O		X1

Note: Do not fully tighten the screws until all of them are in place.

Step 5

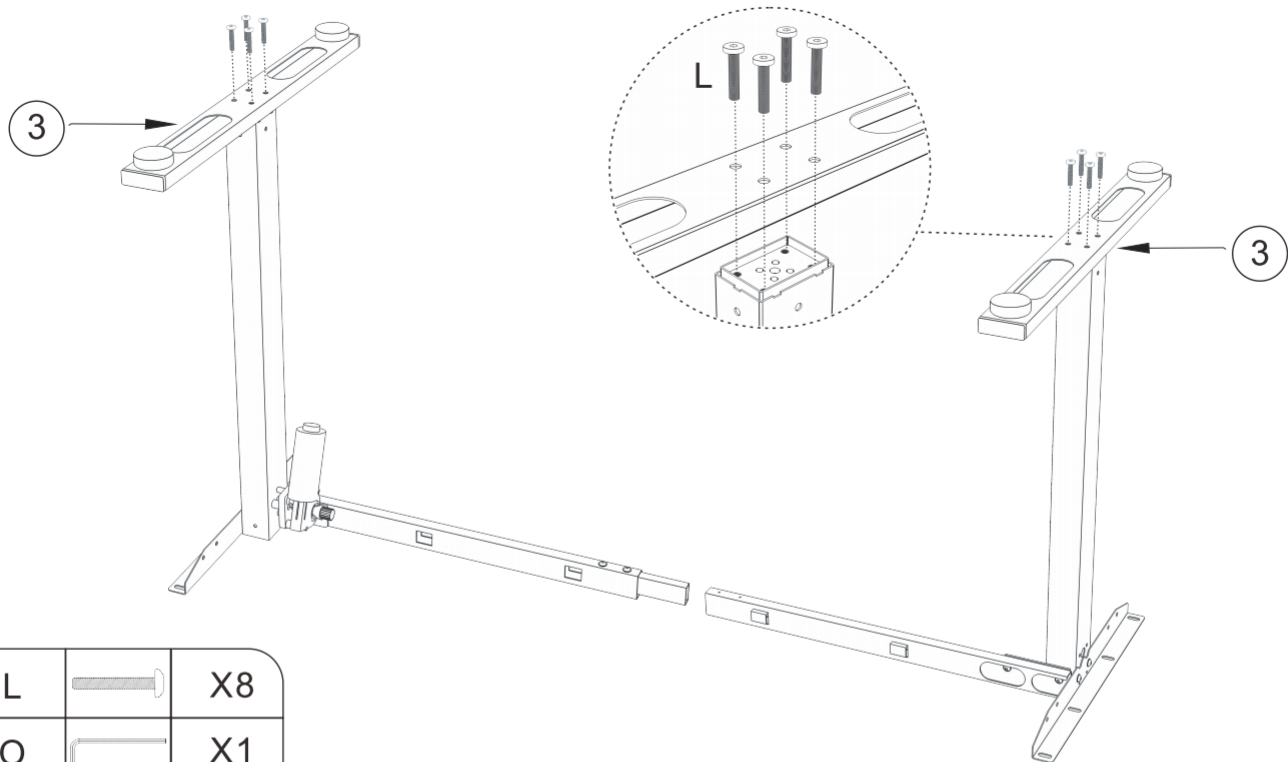


Step 6

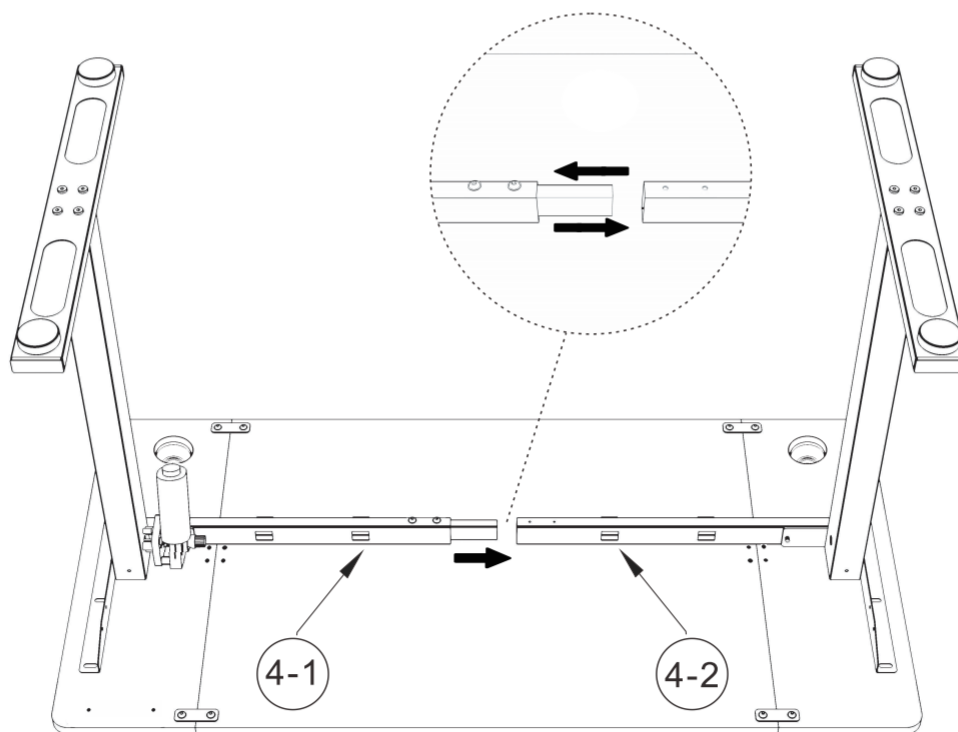

Note: Do not fully tighten the screws until all of them are in place.


Step 7

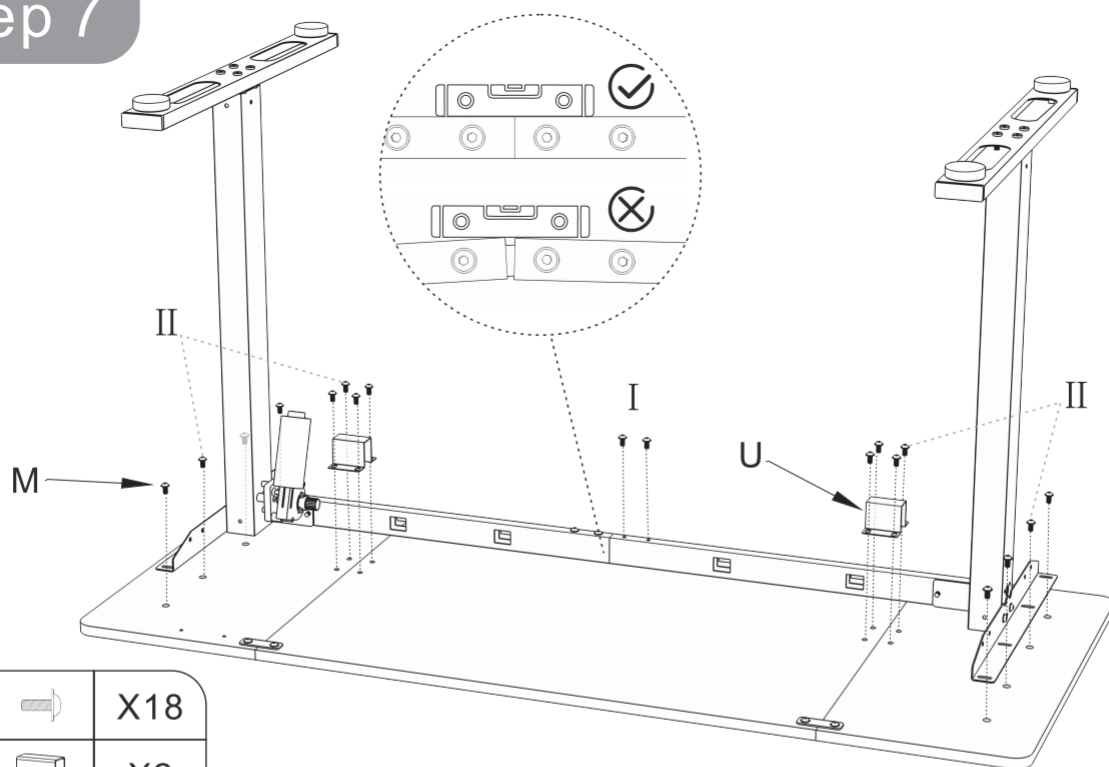

M		X18
U		X2
O		X1

In order: from I to II

Step 8

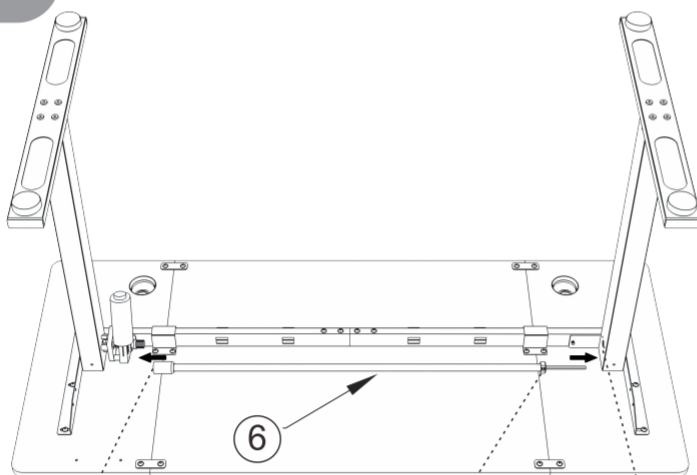




I. Rotate the lock to adjust the length of motor rod.



II. Insert the rod into the hole on one side leg until it stops.




III. Connect the other side of the rod to the motor, then tighten.




Note: Do not fully tighten the screws until all of them are in place.

Step 9

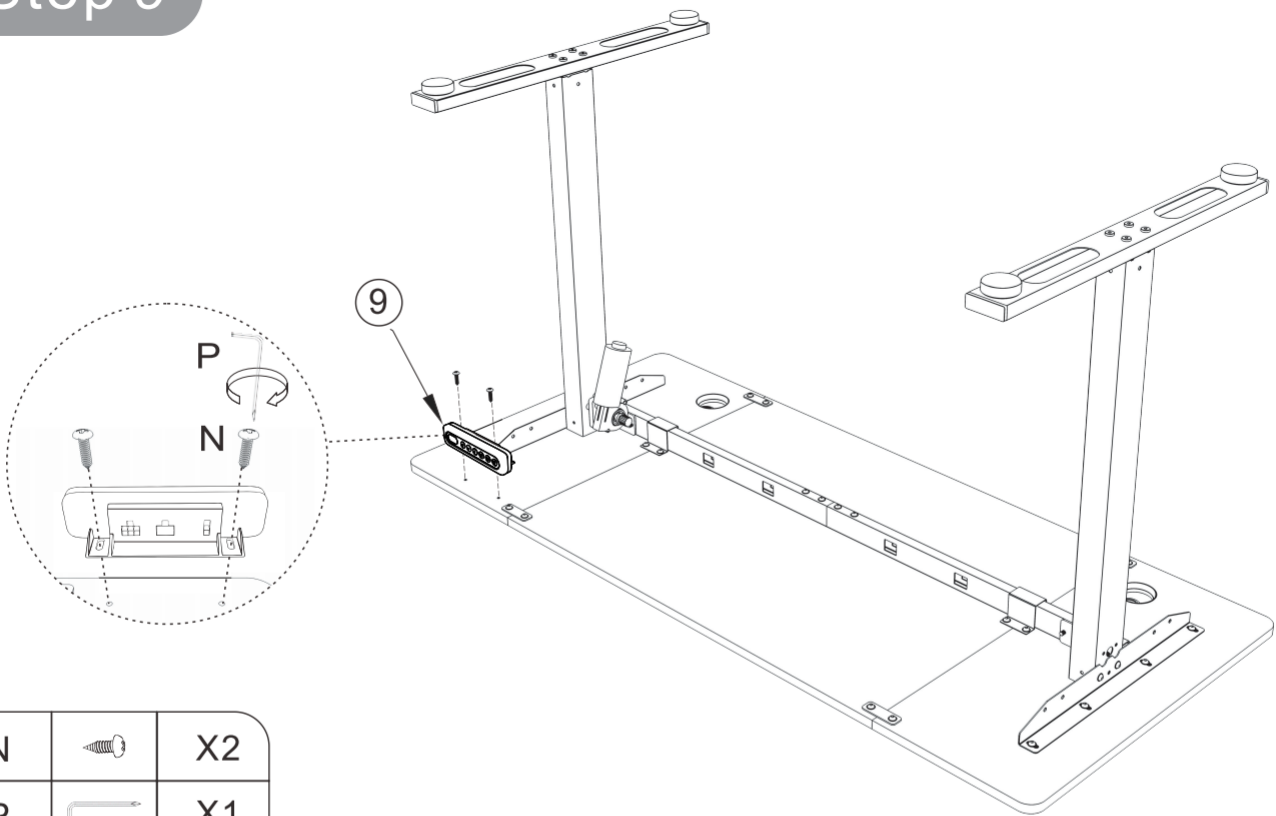

N		X2
P		X1



Step 10

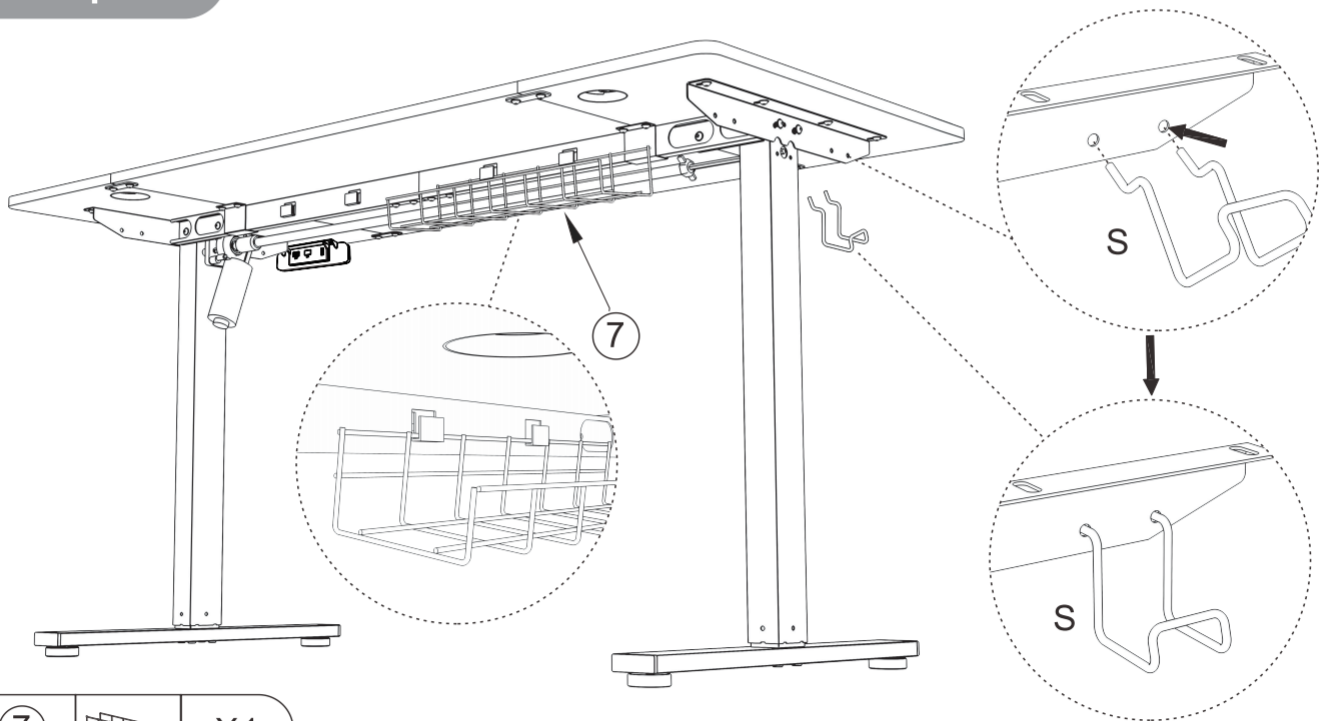


7		X1
S		X2

Note: Do not fully tighten the screws until all of them are in place.

Step 11

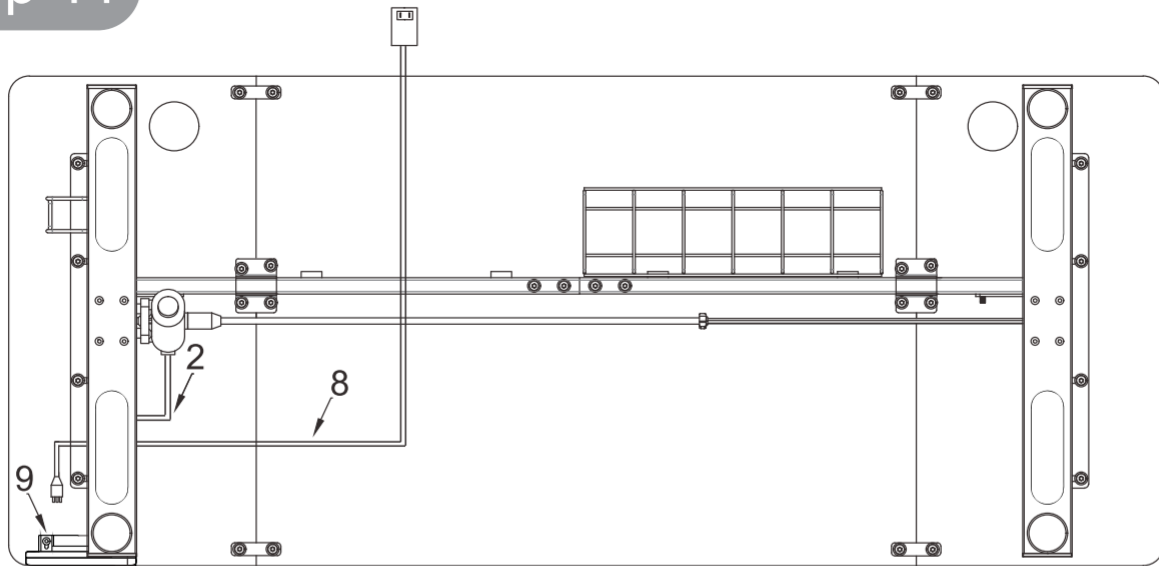

Controller Guidelines

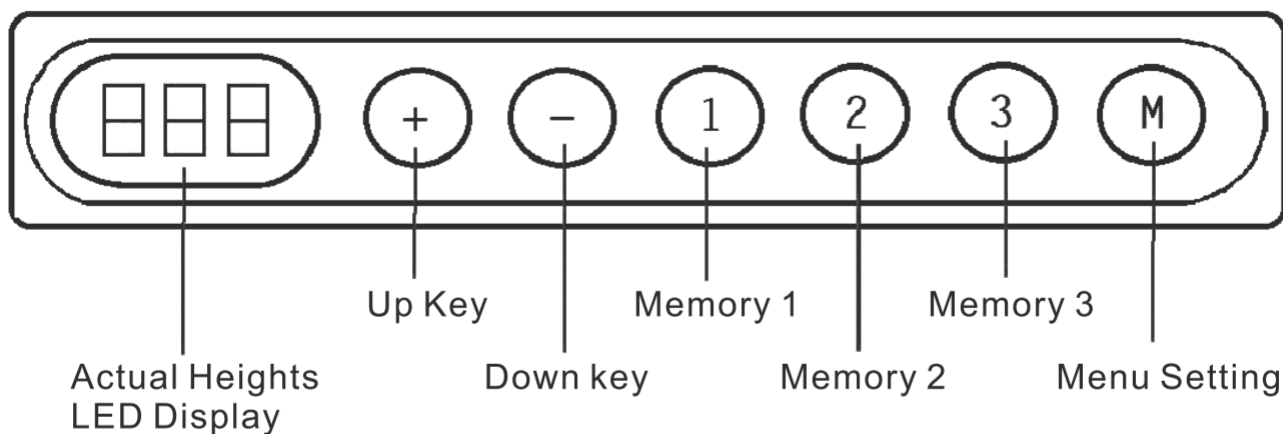

Raise the Desk	Press the "+" button, the desktop upward run, until reach the highest point of the desktop or the button is released.
Lower the Desk	Press "-" button, the desktop run down, until reach the lowest position or the button is released.
Store Position	The hand controller can store to 3 points, the storage method is as follows,when running to a specific point, press both of the "M" button and "1" or "2" or "3" button ,the LED flashes two times after 2 second , storage location to the corresponding label at this time.
Select Height Setting	Press the "1" or "2" or "3" button, and the desktop will move to the height that was previously set for that button.
Child Lock	Lock: Press and hold the "M" and "+" buttons together for 5 seconds to turn child lock on. The screen wil show 'Loc' and the buttons will be disabled. Unlock: Press and hold "M" and "-" buttons together for 5 seconds to unlock.
Initialization Operation/ Reset	When the system is abnormal, or hand controller display the "---", you need to make standing desk initialized. Initialization operation: Press the "-"button, until the motor stopped then after 5 second, enter the initialization modeautomatically.The Led display "RST" .At this time can't loosen the "-"button, if loosen "-" button system initialization stop .When the hand controller display returns to normal, it means initialization is successful.

Error Code Guidelines

Error code	Instructions	How to do?
E-0	EEPROM error	Change the controller
E-1	Operational amplifier error	Change the controller
E-3	Over Current	Reduce the load
E-4	Main power voltage low	Check power
E-5	Motor Hall error	Check the hall or hall line
E-6	Motor over load	Reduce the load
E-8	Motor no connect	Check motor line

If you have any problems installing or using your standing desk, do not hesitate to contact us.

Email: AfterSales-ServiceCenter@outlook.com